


OVERLAP – OFF FRAMING

CLARKDIETRICH BARRIER MESH (SHOWN IN RED TO ILLUSTRATE OVERLAPPING)


18GA-SWG MIN. WIRE TIES AT THE SAME FREQUENCY AS THE SCHEDULE ATTACHMENT METHOD (10"-12" O.C.). 3 TWISTS MIN.

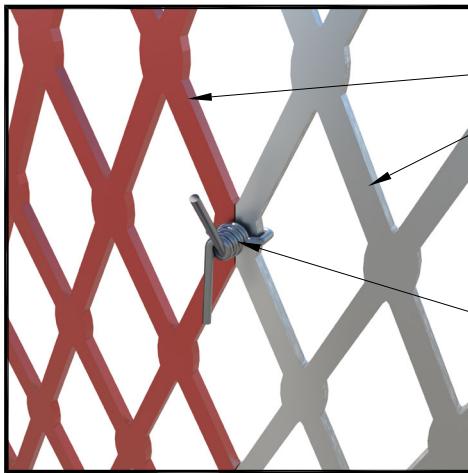

BUTT – OFF FRAMING

CLARKDIETRICH BARRIER MESH (SHOWN IN RED TO ILLUSTRATE BUTT JOINT LOCATION)

18GA-SWG MIN. WIRE TIES AT THE SAME FREQUENCY AS THE SCHEDULE ATTACHMENT METHOD (10"-12" O.C.). 3 TWISTS MIN.

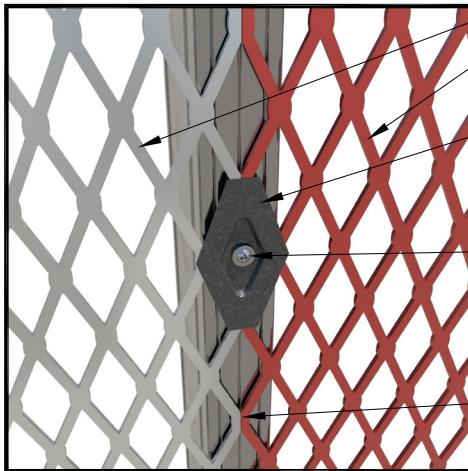

BUTT – ON FRAMING

CLARKDIETRICH BARRIER MESH (SHOWN IN RED TO ILLUSTRATE BUTT JOINT LOCATION)

CLARKDIETRICH BARRIER MESH CLIP AT 10" & 12" OC VERTICALLY (+/-)

CLIP FASTENERS:
METAL STUD – FLAT HEAD BUGLE,
SELF-TAPPING FINE THREAD TYPE S
SCREWS WITH 3/8" PENETRATION (MIN)
WOOD STUDS – FINE THREAD TYPE W
WOOD SCREWS WITH 1-1/4" PENETRATION

ALIGN DIAMONDS TO ALLOW CLIP TO ENGAGE BOTH SHEETS OF BARRIER MESH.

BM-CLIPS ARE NOT NEEDED FOR BARRIER MESH BM50, USE FLAT HEAD OR TRUSS HEAD SCREWS.

BARRIER MESH BUTT JOINT CONNECTIONS



ClarkDietrich.

Engineering Services: (877) 832-3206

Technical Services: (888) 437-3244