


Flat Tail™ Slide Clip

ATTACHMENT TO STRUCTURE: **DESIGNED BY OTHERS**

3-5/8" Flat Tail™ Slide Clip (FTSC3)


Product code	Stud Thickness / Yield Strength	Attachment to Structure	ASD Allowable Loads (lbs)		
			F1 Load	F2 Load	F3 Load
FTSC3-97	33mils (20ga) 33ksi	(2) Fasteners to be designed by others	110	416	388
	43mils (18ga) 33ksi		144	548	397
	54mils (16ga) 50ksi		261	759	596
	68mils (14ga) 50ksi		268	766	673
	97mils (12ga) 50ksi		468	909	699
	33mils (20ga) 33ksi	(4) Fasteners to be designed by others	110	506	428
	43mils (18ga) 33ksi		144	660	397
	54mils (16ga) 50ksi		261	759	596
	68mils (14ga) 50ksi		268	766	673
FTSC3-118	97mils (12ga) 50ksi	(2) Fasteners to be designed by others	468	909	769
	33mils (20ga) 33ksi		110	607	406
	43mils (18ga) 33ksi		144	816	603
	54mils (16ga) 50ksi		261	816	774
	68mils (14ga) 50ksi		328	924	834
	97mils (12ga) 50ksi	(4) Fasteners to be designed by others	468	924	924
	33mils (20ga) 33ksi		110	607	445
	43mils (18ga) 33ksi		144	816	603
	54mils (16ga) 50ksi		261	816	789
	68mils (14ga) 50ksi		328	924	860
	97mils (12ga) 50ksi		468	924	924

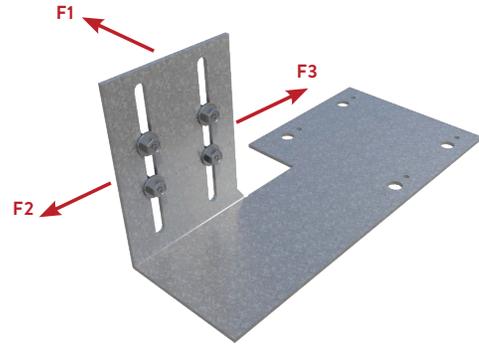

FTSC3

6" Flat Tail™ Slide Clip (FTSC6)

Product code	Stud Thickness / Yield Strength	Attachment to Structure	ASD Allowable Loads (lbs)		
			F1 Load	F2 Load	F3 Load
FTSC6-97	33mils (20ga) 33ksi	(2) Fasteners to be designed by others	165	845	551
	43mils (18ga) 33ksi		216	946	724
	54mils (16ga) 50ksi		316	1057	914
	68mils (14ga) 50ksi		444	1163	962
	97mils (12ga) 50ksi		444	1383	1063
	33mils (20ga) 33ksi	(4) Fasteners to be designed by others	165	869	594
	43mils (18ga) 33ksi		216	959	755
	54mils (16ga) 50ksi		392	1057	930
	68mils (14ga) 50ksi		476	1220	1055
FTSC6-118	97mils (12ga) 50ksi	(2) Fasteners to be designed by others	650	1558	1314
	33mils (20ga) 33ksi		165	861	594
	43mils (18ga) 33ksi		216	1173	874
	54mils (16ga) 50ksi		337	1515	1181
	68mils (14ga) 50ksi		492	1682	1265
	97mils (12ga) 50ksi	(4) Fasteners to be designed by others	492	2026	1439
	33mils (20ga) 33ksi		165	953	594
	43mils (18ga) 33ksi		216	1221	891
	54mils (16ga) 50ksi		392	1515	1215
	68mils (14ga) 50ksi		492	1682	1439
	97mils (12ga) 50ksi		702	2026	1523

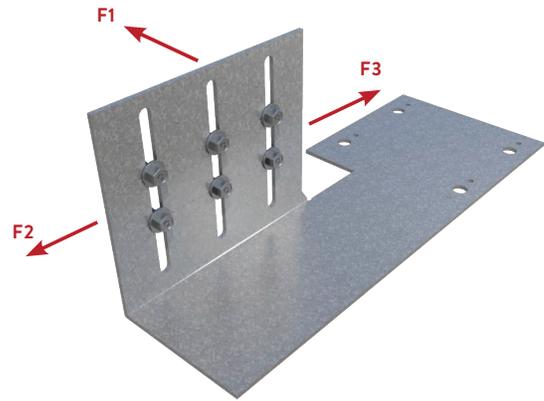

FTSC6

Notes:

- 1 Allowable loads (ASD) listed represent the capacity of the clip to the stud only (framing connection).
- 2 Allowable loads have not been increased for wind, seismic, or other factors.
- 3 (2) #14 Shouldered screws (Proprietary HD Deflection Screws) shall be used per slot, placed with 1-in center-to-center spacing.
  - (4) total screws for the FTSC3 (3-5/8" Clip)
  - (6) total screws for the FTSC6 (6" Clip)
  - #14 Proprietary HD Deflection Screws are provided with each Flat Tail Slide Clip
- 4 It is the responsibility of the design professional to detail the attachment of the clips and verify that their capacity meets the requirements of the intended application.